

# Novacure/Acticure Filter Set



Precision


Control

Repeatability

EXFO's Bandpass Filters are available for use with EXFO Novacure and Acticure Ultraviolet/Visible Spot Cure Systems. They allow the user to tailor the spectral output of the system to suit a wide variety of adhesives, inks and coatings while eliminating unwanted energy.

The Novacure® and Acticure® Bandpass Filters are available in:

- | 250-450nm
- | 320-390nm
- | 365nm
- | 320-500nm
- | 400-500nm

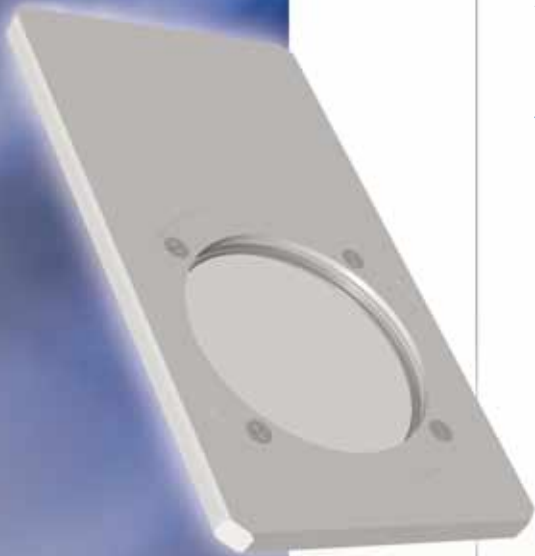


Fiber-optic test,  
measurement, monitoring  
and automation solutions

**EXFO**


Acticure / Novacure with no filter

For use only with extended range liquid or Quartz fiber light guide

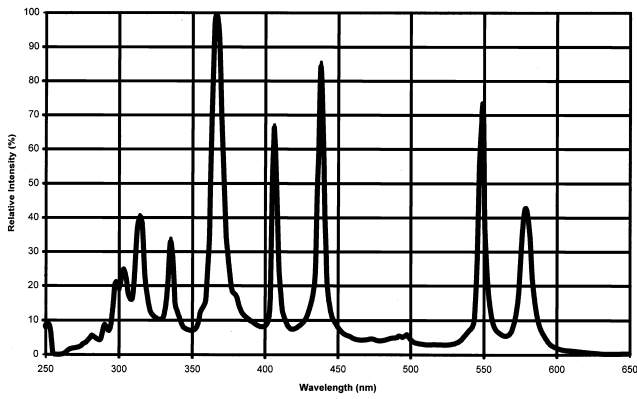

8/11/99


Acticure / Novacure with 320-500nm filter

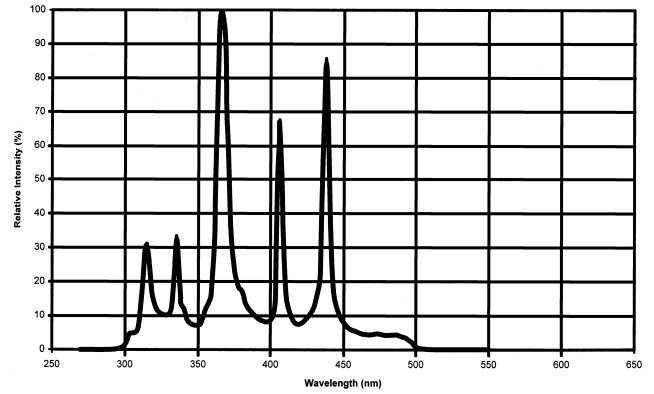

8/11/99


Acticure / Novacure with 250-450nm filter

For use only with extended range liquid or Quartz fiber light guide

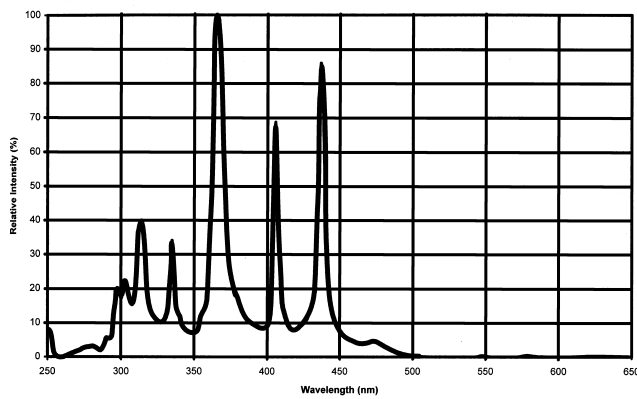


8/11/99

Acticure / Novacure with 320-390nm filter

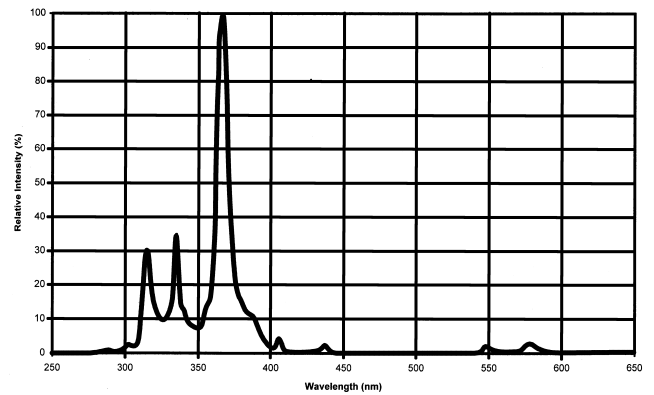


8/11/99

Acticure / Novacure with 365nm filter

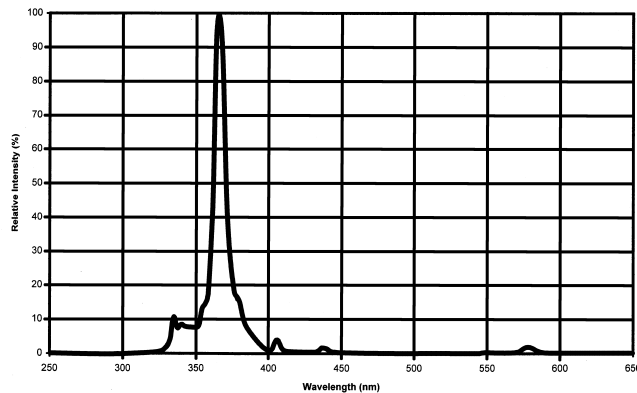

8/11/99

Acticure / Novacure with 400-500nm filter

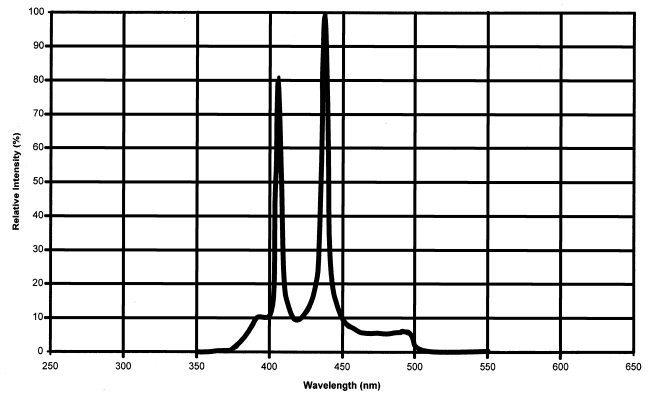

8/11/99

EXFO PHOTONIC SOLUTIONS

2260 Argentia Road

Mississauga (Ontario) L5N 6H7

Tel.: 1 905 821-2600 . Fax.: 1 905 821-2055

TOLL-FREE

Tel.: 1 800 668-8752

CORPORATE HEADQUARTERS

465 Godin Avenue

Vanier (Quebec) G1M 3G7 CANADA

Tel.: 1 418 683-0211 . Fax.: 1 418 683-2170

EXFO AMERICA

1201 Richardson Drive, Suite 260

Richardson TX 75080 USA

Tel.: 1 800 663-3963 . Fax.: 1 972 907-2297

EXFO EUROPE

Le Dynastuer, 10/12 rue Andras Beck

92366 Meudon la Forêt Cedex FRANCE

Tel.: +33.1.40.83.85.85 . Fax.: +33.1.40.83.04.42

EXFO ASIA-PACIFIC

151 Chin Swee Road, #03-29 Manhattan House

SINGAPORE 169876

Tel.: +65 333 8241 . Fax.: +65 333 8242

TOLL-FREE (USA and Canada)

Tel.: 1 800 663-3936

[www.exfo.com](http://www.exfo.com) • [info@exfo.com](mailto:info@exfo.com)

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to the EXFO website at <http://www.exfo.com/support/techdocs.asp>  
In case of discrepancy, the Web version takes precedence over any printed literature.

